

## RELAY MODULE TYPE I7125-8R

The bus-compatible relay module I7125-8R contains 8 independent potential-free relay outputs for controlling flashing lights, horns, fans, etc. In combination with the INOSENT product line Ultimate or Compact Pro the required number of relay outputs can be provided:

- 8 relay outputs 3A 250 VAC or 24 VDC
- 24 VDC supply voltage
- RS485 Modbus RTU-Interface
- DIN rail mounting

### RELAY OUTPUT MODULE (SPECIFICATIONS)

**SUPPLY VOLTAGE:** 24 VDC

**POWER CONSUMPTION :** <6 VA

**WIRING:** 2x2x0,75 mm<sup>2</sup>, shielded

**NUMBER OF OUTPUTS:** 8


**OUTPUT TYPE :** Electromagnetic relay, 3A 250 VAC or 24 VDC

**PROTECTION CLASS:** IP 20

**OPERATING CONDITIONS:** -10...+55 °C, < 80 % RH

**WEIGHT:** 400 gr

**CERTIFICATIONS:** CE

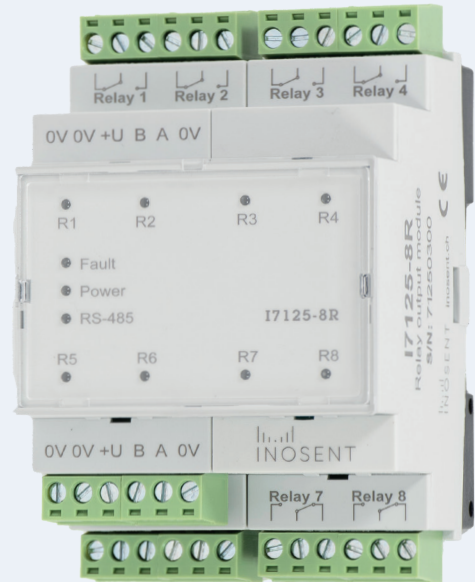

### DIMENSIONS AND CONNECTIONS

